

Rec'd PCT/PTO 01 SEP 2004

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
12 September 2003 (12.09.2003)

PCT

(10) International Publication Number  
WO 03/074413 A1(51) International Patent Classification: B66D 3/00,  
B63B 21/16

(21) International Application Number: PCT/GB03/00932

(22) International Filing Date: 6 March 2003 (06.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0205252.0 6 March 2002 (06.03.2002) GB(71) Applicant (for all designated States except US): STOLT  
OFFSHORE LIMITED [GB/GB]; Bucksburn House,  
Howes Road, Bucksburn, Aberdeen AB16 7QU (GB).

(72) Inventors; and


(75) Inventors/Applicants (for US only): BURSAUX.

Gabriel, André [FR/US]; 755, Timber Hill Drive,  
Houston, TX 77024 (US). WILLIS, Stewart, Kenyon  
[GB/GB]; 2 Burnside Walk, Aboyne, Aberdeenshire AB34  
5GJ (GB). ALLIOT, Vincent [FR/FR]; 29, rue Clauzel,  
F-75009 Paris (FR). FRAZER, Ian [GB/GB]; Whitestone  
Farm, Finzean, Aberdeenshire AB31 6LX (GB). VENNE-  
MANN, Olav [DE/GB]; 53 Jasmine Terrace, Aberdeen  
AB24 5LD (GB).

(74) Agent: FITZPATRICKS; 4 West Regent Street, Glasgow  
G2 1RS (GB).(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD.

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR DEPLOYING ARTICLES IN DEEP WATERS

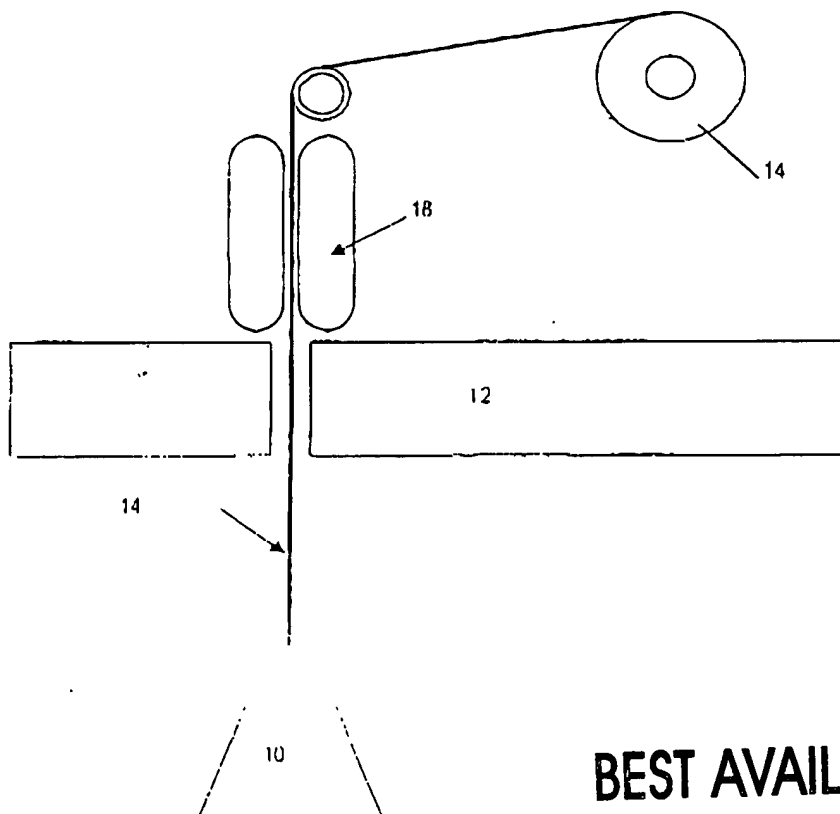

(57) Abstract: A fibre rope is used for hoisting articles from a vessel (12) in deep waters. The fibre rope has substantially neutral buoyancy. The rope (10) is handled in vertical orientation by a track type tensioner (18) or moving clamps, in order to avoid bend cycling under load.

BEST AVAILABLE COPY

## PATENT COOPERATION TREATY

## PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference <b>47/64056W0</b>	<b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, Item 5 below.	
International application No. <b>PCT/GB 03/ 00932</b>	International filing date (day/month/year) <b>06/03/2003</b>	(Earliest) Priority Date (day/month/year) <b>06/03/2002</b>
Applicant <b>STOLT OFFSHORE LIMITED</b>		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

## 1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing:

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ Certain claims were found unsearchable (See Box I).

3. ☐ Unity of invention is lacking (see Box II).

## 4. With regard to the title,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

## 5. With regard to the abstract,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 13.2, by this Authority as follows (see Box III). The applicant will, within one month from the date of publication of text, submit a revised abstract.

## 6. The figure of the drawings to be published with the abstract is Figure No.

☒ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

1

☐ None of the figures.

## INTERNATIONAL SEARCH REPORT

 International application No.  
PCT/GB 03/00932

 A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 B66D3/00 B63B21/16

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

 Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 B66D B63B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

 Electronic data base consulted during the international search (name of data base and, where practical, search terms used)  
EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 98 50719 A (GROOT ANNE KLAAS DE ;ITREC B V (NL); KALKMAN PIET (NL)) 12 November 1998 (1998-11-12) the whole document	1-27
Y	US 4 013 205 A (FABRE-CURTAT MICHEL ET AL) 22 March 1977 (1977-03-22) column 1, line 15 - line 29; figures	1-27

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search:

9 July 2003

Date of mailing of the international search report

21/07/2003

 Name and mailing address of the ISA  
European Patent Office, P.O. 5616 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer:

De Schepper, H

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No  
PCT/GB 03/00932

Parent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9850719 A	12-11-1998	NL 1005992 C2	09-11-1998
		AU 7351598 A	27-11-1998
		BR 9806906 A	16-05-2000
		GB 2333571 A ,B	28-07-1999
		WO 9850719 A1	12-11-1998
		NO 995360 A	10-12-1999
		US 6439445 B1	27-08-2002
US 4013205 A	22-03-1977	FR 2275386 A1	16-01-1976
		CA 1031800 A1	23-05-1978
		DE 2526071 A1	08-01-1976
		DK 275575 A	19-12-1975
		GB 1506407 A	05-04-1978
		IT 1039083 B	10-12-1979
		JP 51014163 A	04-02-1976
		NL 7507219 A	22-12-1975
		NO 752156 A ,B,	19-12-1975
		SE 400063 B	13-03-1978
		SE 7506941 A	19-12-1975
		SU 591158 A3	30-01-1978

640561F - 2003-03-05

10/506392

DT09 Rec'd PGT/PTO 01 SEP 2004

1

METHOD AND APPARATUS FOR  
DEPLOYING ARTICLES IN DEEP WATERS

## INTRODUCTION

5

The invention relates to methods and apparatuses for deploying articles to great depth beneath the sea surface, for example to the seabed in deep waters.

10 Cranes and winches employing wire rope have been used to deploy loads to the seabed in modest water depth for many years. Some of these cranes and winch systems are fitted with, or used in conjunction with, heave compensators, which take-up and pay out the rope dynamically, to compensate vertical motion (heave) of the ship, barge or other platform from which the rope is supported.

15

As water depth increases, the weight of wire needed to lower equipment to the seabed increases until it becomes such a significant part of the total load that the method becomes impractical. Man made fibre rope can be almost neutrally buoyant and have strength and elastic characteristics similar to wire rope and is therefore potentially a

20 suitable replacement for wire. Man made fibre rope, however, has a poor tolerance to the fatigue induced by bend cycling under load, and is thus unsuitable for use with current winch designs, particularly but not only those having heave compensation.

25 The present invention aims to provide novel methods and apparatus for using fibre rope, when deploying loads from a vessel at sea. A particular object for at least some embodiments of the invention is to provide methods that reduce bend cycling of the rope under load. A further aim is to allow operations to depths exceeding 300m or 1000m.

30

64056711, 2003-413-015

2

In broad terms, in one aspect of the invention a tensioning device mounted substantially vertically is used to grip the fibre rope, supporting the load and facilitating the payout of the rope.

- 5 The tensioning device may in particular be a continuous track system (linear winch) and can be made up from multiple units mounted around the fibre rope.

The tensioning device may alternatively comprise at least one clamp comprising a plurality of pads arranged longitudinally and circumferentially around the fibre rope,  
10 and mounted on a movable carriage

Substantially the entire load in the fibre rope is taken by the tensioning system; the rope entering the tensioning system is not under substantial load. This allows the fibre rope to be stored on a storage reel or carousel without bending under load. Of course some  
15 back-tension may be maintained on the reel for control of the rope.

The tensioning device may have a general form and features in common with clamps and/or track-type tensioners used conventionally for pipe laying operations. In preferred embodiments, however, at least the shoes of the tensioner are specially  
20 adapted to the different characteristics of the fibre rope, and would not be suitable for smooth conduit.

Several specific adaptations of tensioner and clamp are described below, by way of example only. These may be used individually or in any combination, and the invention  
25 does not exclude other adaptations, nor the use of an existing pipelay tensioner.

The tensioner may be mounted so as to suspend the rope from beside the vessel, or via a moonpool. A tower arrangement for vertical deployment of flexible conduit through a moonpool is known for example from WO 91/15699 A (Collexip). As is also known in  
30 the pipe laying art, vertical or steeply inclined towers of other constructions can be applied. "Vertical" in the present context is intended to encompass a range of deviation from the vertical, particularly (i) the load for whatever reason acts in a direction

6-1056111 - 2003-03-05

3

inclined from the vertical (in which case the tensioner may be tilted to aligned with the load direction) and (ii) where fatigue under bend cycling is serious only beyond a certain bend angle. An offset tower permitting pipelay with an inclined tensioner is known for example from WO 02/57675 A.

5

Tower arrangements providing a pair of moving clamps are disclosed in WO 99/35429 A (Coflexip) and in our co-pending application GB 0302279.5, not published at the present priority date. Suitable clamps are described in our co-pending application GB 2 364 758 A (63566GB). The contents of these documents are hereby incorporated

10 herein by reference.

6-295610 - 2003-01 5

4

## BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the invention will now be described, by way of example only, by reference to the accompanying drawings, in which:

5

Figure 1 is a schematic diagram illustrating the general arrangement of a rope-based lifting and lowering apparatus including a vertical tensioner according to an embodiment the present invention;

10 Figure 2, shows a gripping pad design suitable for use in a number of embodiments of the invention;

Figures 3, 4 and 5 shows an arrangement using three of the pads of figure 2 in various stages of operation;

15

Figure 6 shows an abandonment and recovery system using moveable clamps to hold the rope;

20 Figures 7, 8 and 9 show schematically three specific adaptations of the tensioner within the apparatus of Figure 1.



6405611F - 2003-03-05

5

## DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

Figure 1 provides an overview of the deployment system which is used to lower a load 10 to the seabed from a ship, barge or other sea-borne vessel 12. Fibre rope 14 is stored in a spooling system 16, which does not serve as a winch for the weight of the load 10, however. A continuous track tensioner 18 engages the rope 16 by friction and or other means and provides the tension for controlled lowering or lifting of the load.

Tracks or the like arrayed around the axis of the rope 14 are pressed radially inward by suitable rams, levers and the like to grip the rope, and to release it again when required. Each track comprises a series of individual shoes linked together. While two tracks are shown for the sake of illustration, three or four tracks will be more usually provided, spaced at  $120^\circ$  or  $90^\circ$  intervals around the rope axis respectively.

The detailed construction and operation of the structures for supporting these tensioners in vertical and/or inclined positions above the sea surface can be readily envisaged by the skilled person, for example by reference to prior art in the field of pipe and cable laying, including those documents mentioned already above.

Ideally, to use fibre rope in combination with a multi-track tensioner, equipped with pads on the tracks, the pad design should be adapted to the rope. A rope behaves different than, say, an umbilical or pipeline (flexible or rigid), when it is fed through a tensioner, compressed by the pads and brought under tension. Unlike pipes and umbilicals, the diameter of the rope can change significantly with increasing load onto the pads as well as with increasing tension to the rope. Furthermore the danger of pinching the rope between the pads is significant. Therefore a proper fit of the rope between the pads should be always ensured, regardless of the load to the pads or the tension to the rope.

Figure 2 shows a novel design of a pad, adapted to the behaviour of the fibre rope. The radius  $R_{pad}$  contact surface of the pads is bigger than the nominal radius  $R_{rope}$  of the rope, and the centre of the radius of curvature is beyond the centre of the rope when the

64056171 - 2003-03-05

6

pads are brought into contact with the rope. In this way the cross sectional area is smaller than the calculated circular area of the radius on the pad ( $\pi r^2$ ). When the pads are closed, the cross sectional area has an approximately triangular shape. This is beneficial in order to avoid pinching of the rope between the pads when approaching.

5 For a four-track tensioner, the shape will be square.

Figure 3 shows three of the pads 20 in use contacting a rope 21. The first contact of the rope and the pads will occur in the middle of the radius area. By further closing the pads (moving to the centre line) the rope will change its shape to a slightly triangular shape. On this stage the rope starts to get compressed at the areas of initial contact (see Fig 4.). Compression of the rope starts in the middle of the contact area of the pads to the rope, when load to the pads will be applied. The cross sectional area of the rope reduces as the pads move closer to the centre line and the rope gets compressed. The bigger radius on the pads avoids a pinching of the rope between the pads when moving closer. When fully closed (still without pads in contact to each other) the cross sectional area is much less than for the unsqueezed rope (see Fig 5).

10

15

This will happen even under tension of the rope. According to this, the cross sectional area described by the closed pads needs to be less than the nominal cross sectional area of the rope.

20

Figure 6 shows another installation where the track type tensioner is replaced by a movable clamp or preferably a pair of clamps, to pay out or haul in the fibre rope. This shows a tower 106 with a winch 100 mounted at the top. The fibre rope on this which 100 is sourced from a spool 102. It is connected to a load (in this case the end of a pipeline 104, via a pipeline end termination (PLET)). Two clamps 210, 220 having the novel pad arrangement as described above hold the rope. Again, the clamp may be formed in two, three or four sections. The same clamps have been used to lay the pipeline, and then adapted by changing their shoes to handle the fibre rope for abandonment of the pipeline.

25

30

64056191 - 2003-03-05

7

During deployment and/or recovery both clamps 210, 220 move relative to each other, in a sequential manner to and from the middle of the tower, to hand over the grip on the rope from one clamp to the other. This action results in the paying in or out of the rope, and can be controlled to provide continuous movement. (With a single movable clamp  
5 and a fixed clamp, only intermittent movement could be achieved.)

Three other possibilities have been considered for adapting the tensioner specifically for gripping of the fibre rope.

10 Figure 7 shows a further adaptation of the tensioner gripping pads 200 which are made deformable. The deformation under radial pressure accommodates for example the braided surface variations of the rope, while also engaging them to assist in transferring tension from the rope to the hoist. This adaptation may be combined with the novel form described above, if desired, and may be used as movable clamps as well as track  
15 tensioner.

Figure 8 shows another adaptation in which the arrays of gripping elements 300 and 302 of the tensioner on opposite sides of the rope axis are staggered so as to induce  
20 snaking of the rope 14 under radial gripping pressure.

Figure 9 shows another adaptation, in which stoppers 400 are embedded in the rope 14 at intervals along its length. The rope may be gripped by elements 402 of the tensioner  
25 18 having corresponding spacing.

25 The above adaptations are provided by way of example only, and the skilled reader will appreciate that other arrangements are possible within the spirit and scope of the invention. In particular, it will be noted that the adaptations of Figures 7, 8 and 9 can be used alone or in combination. Thus, for example, gripping elements 300, 302 and 402  
30 of Figures 8 and 9 can be made deformable in the manner of Figure 7. Similarly, elements 400 and 402 of the Figure 4 arrangement can be provided in staggered arrays, for example at right angles to one another about the rope axis.

640561-P - 2003-03-05

8

The method can be applied beneficially in oil & gas field development (sub-sea construction) in depths beyond 300m. General lifting and lowering operations can also be envisaged in depths down to full oceanic depth, for example for Salvage, Oceanography, and Military purposes.

G40561F - 2004-02-05

9

## CLAIMS

1. Apparatus for supporting loads from a vessel at sea using fibre rope, said apparatus including a tensioning device mounted substantially vertically used to grip  
5 the fibre rope, said tensioning device supporting the load and facilitating the paying out and hauling in of the rope.
2. Apparatus as claimed in claim 1 wherein said tensioning device comprises multiple units mounted around the fibre rope axis, each having at least one contact pad  
10 for engaging the fibre rope over a corresponding part of its circumference.
3. Apparatus as claimed in claim 2 wherein the or each contact pad has a curved contact surface whose radius of curvature is substantially greater than the radius at which the pad is arranged to engage the rope.
- 15 4. Apparatus as claimed in claim 2 or 3 wherein the or each contact pad has a curved contact surface which subtends an angle of arc substantially less than one whole circle divided by the number of units mounted around the fibre rope axis.
- 20 5. Apparatus as claimed in claim 3 or 4 wherein there are provided three units whose contact surfaces when brought together form a shape that is substantially triangular with sides curved outwards.
6. Apparatus as claimed in claim 3 or 4 wherein there are provided four units  
25 whose contact surfaces when brought together form a shape that is substantially square with sides curved outwards.
7. Apparatus as claimed in any of claims 2 to 6 wherein each unit of the tensioning device comprises a plurality of segments connected to form a continuous track.

30

6405611 - 2003-03-05

10

8. Apparatus as claimed in any of claims 2 to 6 wherein said tensioning device comprises at least one clamp mounted so as to be movable under load in the direction of the rope axis.

5 9. Apparatus as claimed in claim 8 wherein there are provided two clamps which are operable to move relative to each other in a sequential manner upwardly and downwardly, and to hand over the grip on the rope from one clamp to the other so as to achieve continuous movement of the rope and load.

10 10. Apparatus as claimed in any preceding claim wherein said tensioning device has a form and features suitable for pipe laying operations, but provided with shoes specially adapted for the characteristics of the fibre rope.

11. Apparatus as claimed in any preceding claim wherein a storage reel for said  
15 fibre rope is arranged such that substantially the entire load in the fibre rope is taken by said tensioning device.

12. Apparatus as claimed in claim 11 operable such that some back-tension is maintained on the reel for control of the rope.

20 13. Apparatus as claimed in any preceding claim wherein the tensioning device is mounted so as to suspend the rope from beside the vessel.

14. Apparatus as claimed in any preceding claim wherein the tensioning device is  
25 mounted so as to suspend the rope via a moonpool.

15. Apparatus as claimed in any preceding claim wherein contact pads of said tensioning device are made deformable.

30 16. Apparatus as claimed in any preceding claim wherein arrays of contact elements of said tensioning device on opposite sides of the rope axis are staggered so as to induce snaking of the rope under radial gripping pressure.

640561P - 2003-03-05

11

17. Apparatus as claimed in any preceding claim in combination with a rope having stoppers embedded in the rope at intervals along its length.
- 5 18. Apparatus as claimed in claim 17 wherein gripping elements of the tensioning device having spacing corresponding to said stoppers.
19. A method of supporting a load from a vessel at sea using fibre rope wherein a tensioning device mounted is substantially vertically and used to grip the fibre rope,  
10 said tensioning device supporting the load and facilitating the paying out and hauling y-in of the rope.
20. A method as claimed in claim 19 wherein substantially the entire load in the fibre rope is taken by said tensioning device, and parts of the rope under tension are not  
15 diverted substantially from vertical.
21. A method as claimed in claim 20 wherein some back-tension is maintained on the reel for control of the rope.
- 20 22. A method as claimed in claims 19 to 21, wherein the tensioning device is adapted as claimed in any of claims 3 to 18.
23. Rope specifically adapted for use in a method or apparatus as claimed in any preceding claim.
- 25 24. Gripping arrangement for a fibre rope wherein there is provided a plurality of contact pads, said pads being arranged longitudinally and circumferentially around the fibre rope axis and wherein the contact area of each pad is curved and the radius of curvature of the contact surface of each pad is substantially greater than the radius at  
30 which the pad is arranged to engage the rope.

6405671 - 2003-03-05

12

25. Gripping pad arrangement for a fibre rope wherein there is provided a plurality of pads, said pads being arranged longitudinally and circumferentially around the fibre rope axis and wherein the contact area of each pad is curved and the angle of are suspended by the curved surface of each pad is substantially less than one whole circle divided by the number of units.

26. Gripping pad arrangement as claimed in claim 25 wherein there are provided groups of three pads arranged around the rope axis to form when brought together a shape that is substantially triangular with sides curved outwards.

10

27. Gripping pad arrangement as claimed in claim 25 wherein there are provided four pads arranged to form when brought together a shape that is substantially square with sides curved outwards.



64056171 - 2003-03-05

13

## ABSTRACT

METHOD AND APPARATUS FOR  
DEPLOYING ARTICLES IN DEEP WATERS

5 A fibre rope is used for hoisting articles from a vessel (12) in deep waters. The fibre  
rope has substantially neutral buoyancy. The rope (14) is handled in vertical orientation  
by a track type tensioner (18) or moving clamps, in order to avoid bend cycling under  
10 load.

(Fig. 1)

**10/506392**

1/7

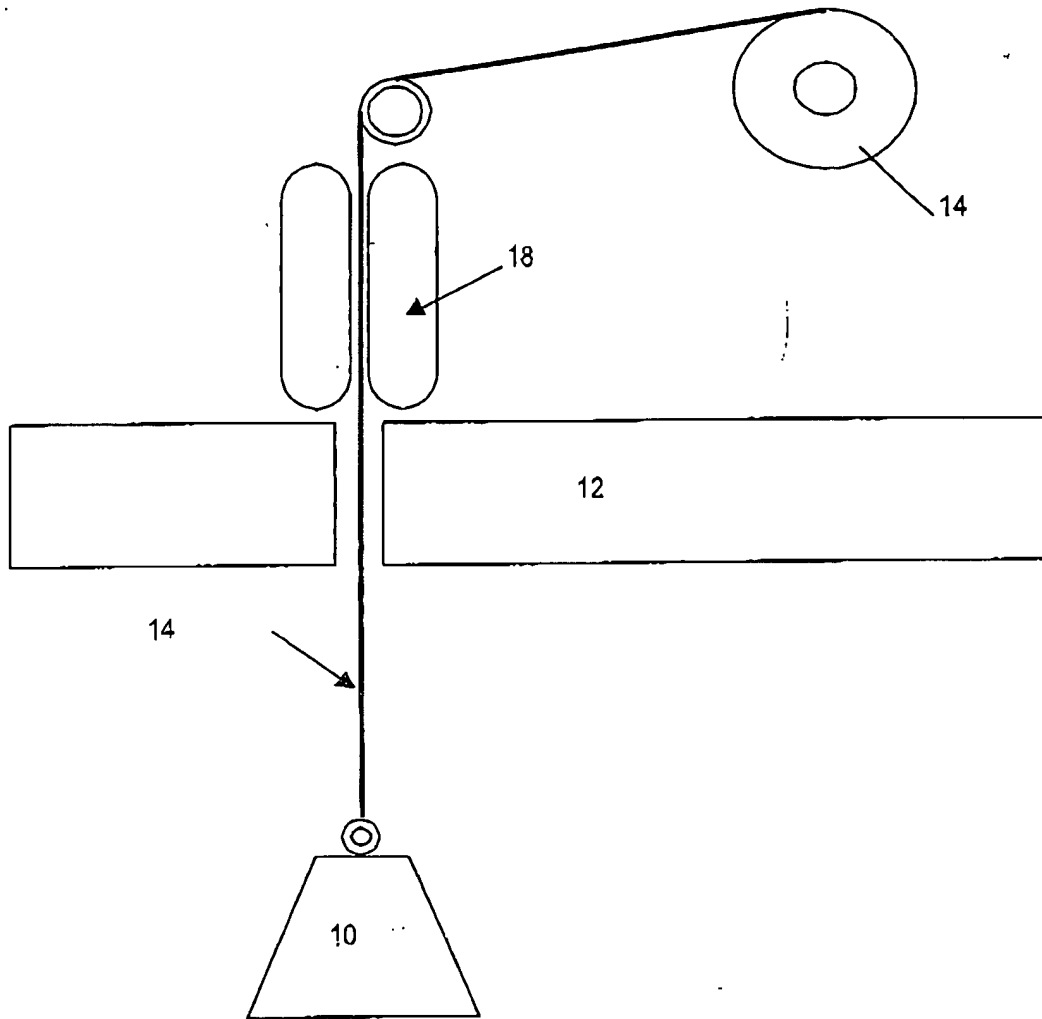


FIG. 1

10/506392

2/7

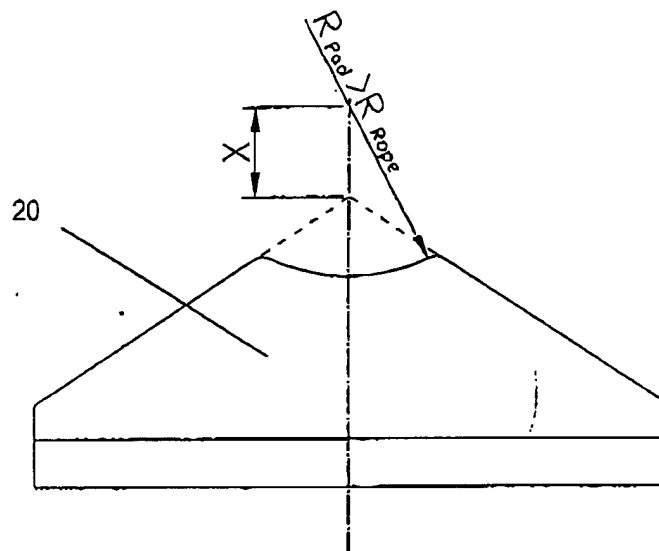


FIG. 2

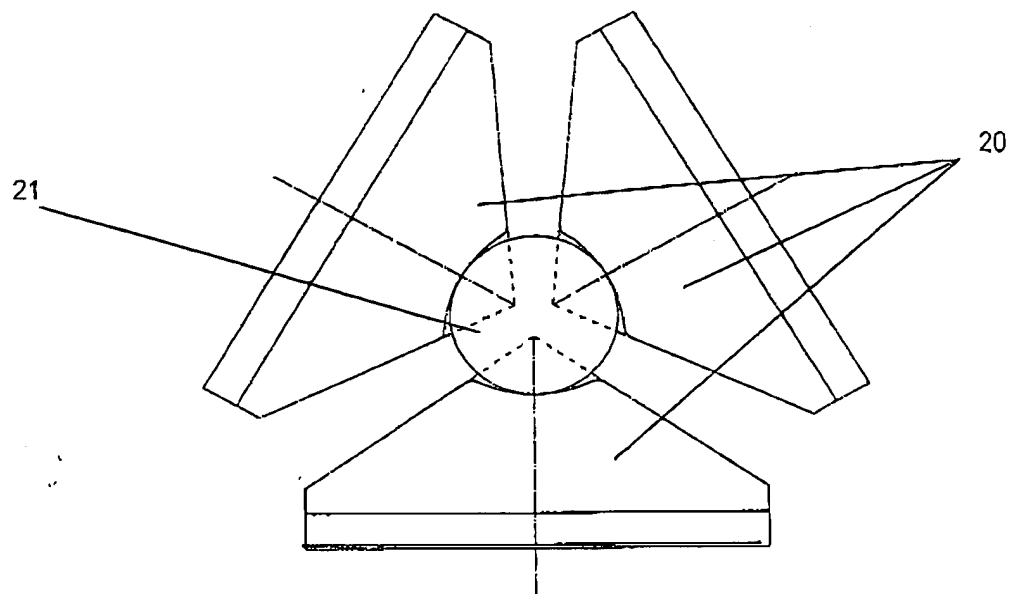


FIG. 3

10/506392

3/7

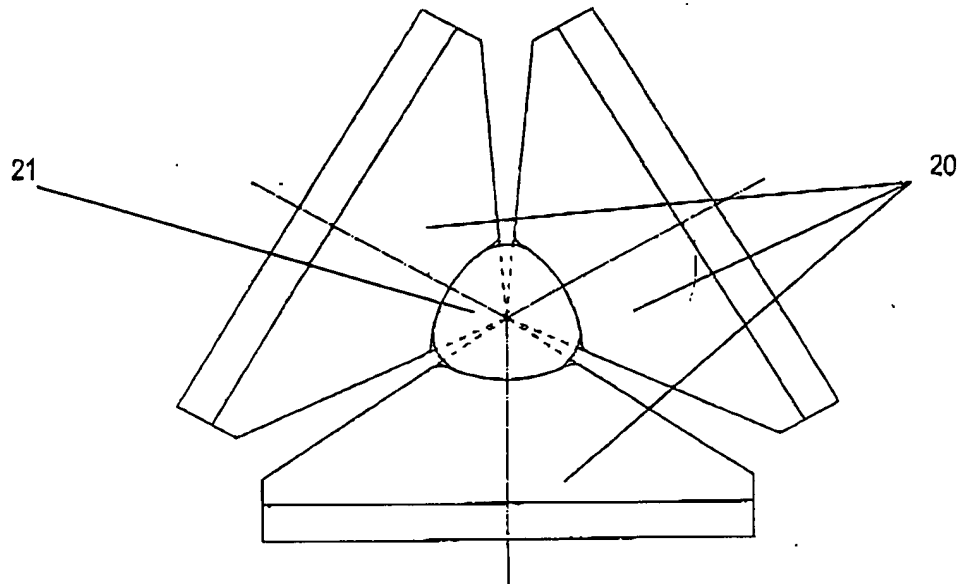


FIG. 4

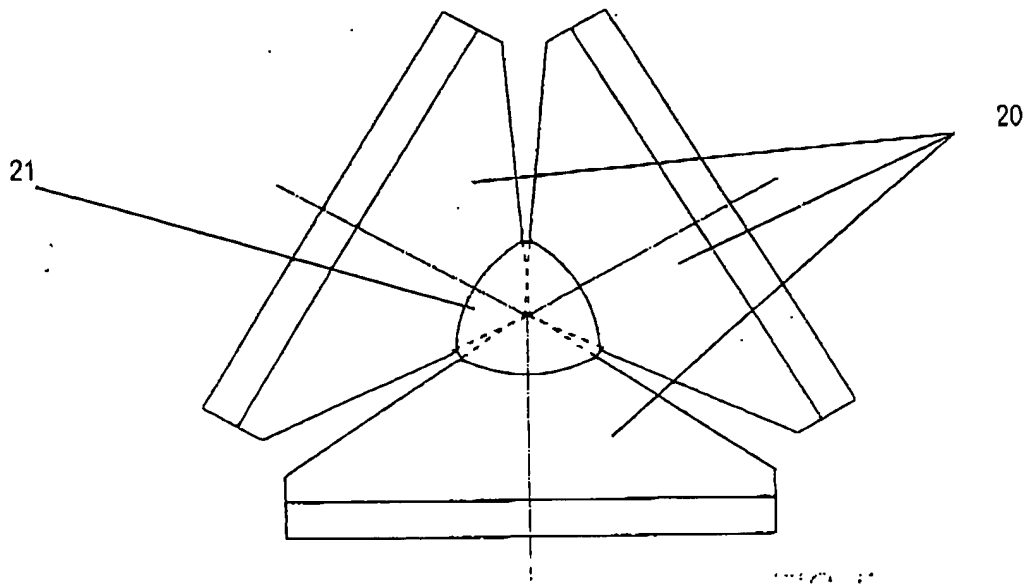


FIG. 5

10/506392

4/7

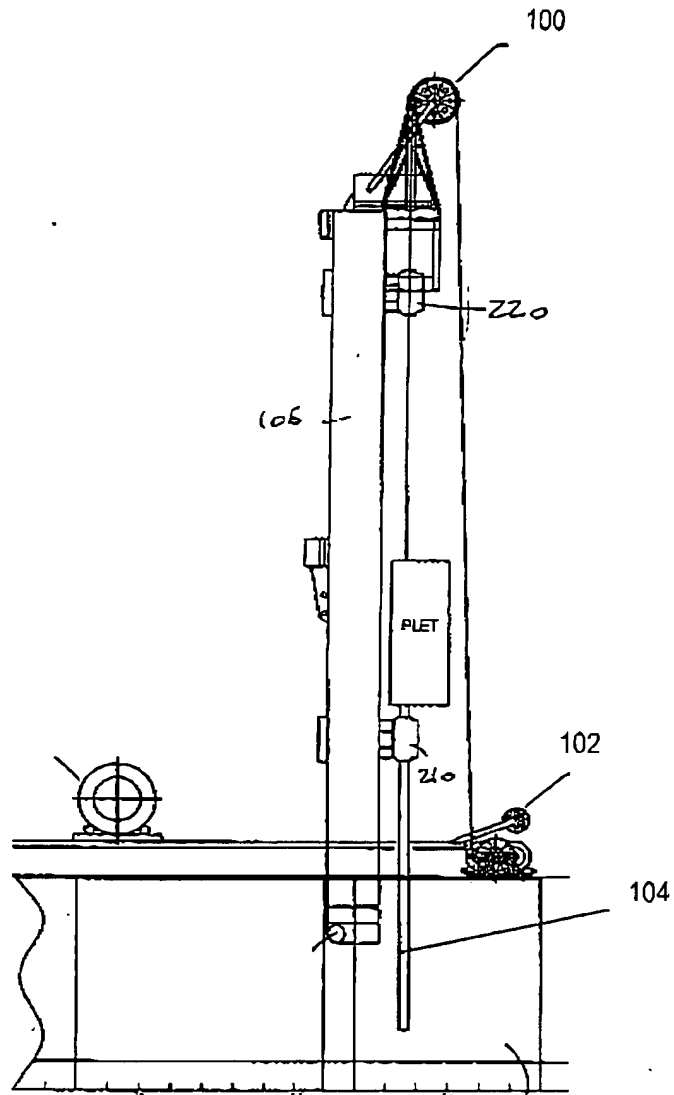


FIG. 6

10/506392

3/7

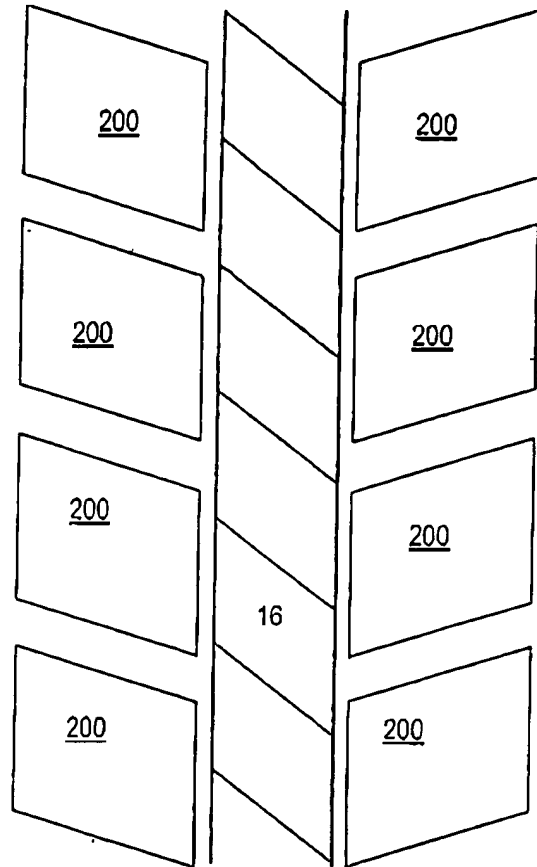


FIG. 7

10/506392

6/7

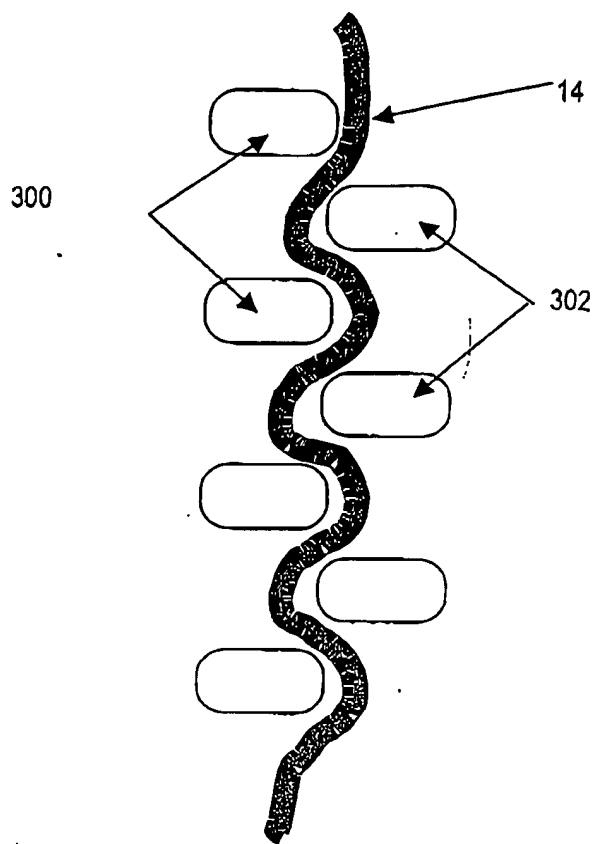


FIG. 8

10/506392

7/7

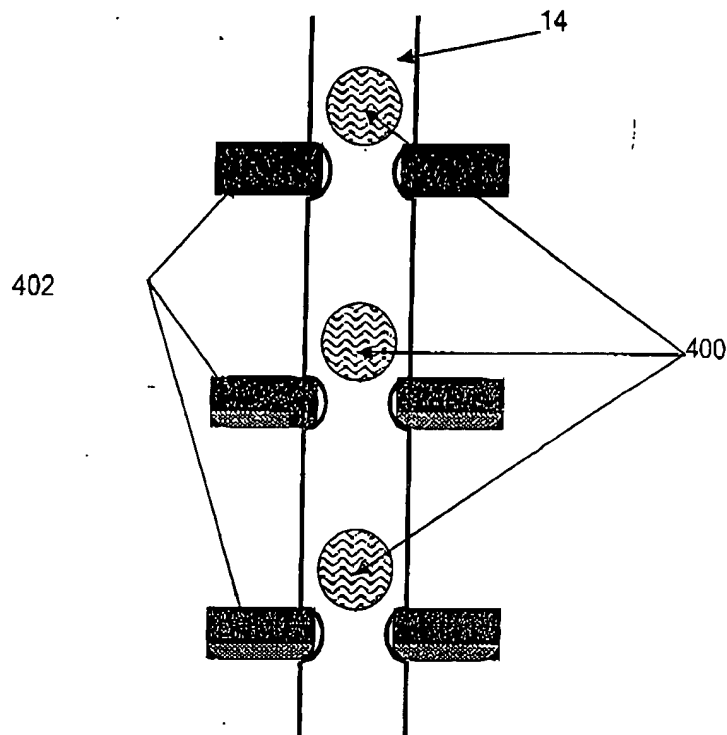


FIG. 9



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**